


UpRight
POWERED ACCESS

SCISSOR LIFT X-series, electric



Electric Scissor Lift X-series

- Working height up to 11,8 m.
- Manoeuvres easily with tight inside turning radius.
- Fully proportional one-hand controls.
- Outdoor rated.
- Non-marking tyres.
- Folding guardrails.
- Steel deck with slip-resistant surface.

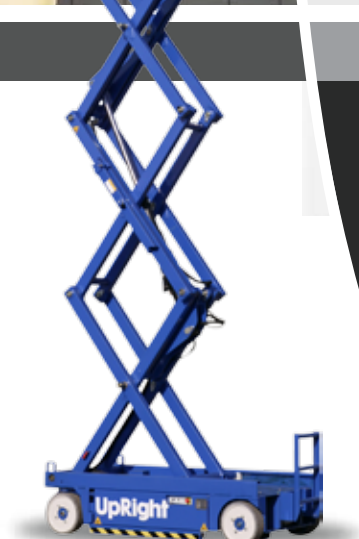

X26N
X26
X32


PlatformSales
EUROPE


MODEL	X26N	X26	X32
Max. Working Height (A)	10 m	10 m	11,7 m
Max. Platform Height (B)	7,93 m	7,93 m	9,7 m
Stowed Height (C)	2,12 m	2,12 m	2,25 m
- With Guardrails lowered	1,99 m	1,99 m	1,88 m
Ground Clearance	9 cm	9 cm	9 cm
Length - Stowed (D)	2,35 m	2,35 m	2,35 m
Width (E)	0,76 m	1,22 m	1,22 m
Platform Size (with deck extended)	0,71 x 3,2 m	1,17 x 3,2 m	1,17 x 3,2 m
Lift Capacity	340 kg	454 kg	340 kg
Drive Speed (Stowed)	3,2 km/h	3,2 km/h	3,2 km/h
Drive Speed (Raised)	0,8 km/h	1 km/h	1 km/h
Gradeability	25% / 14°	22% / 12°	22% / 12°
Lift speed - raise/lower	42/40 sec	45/40 sec	65/40 sec
Turning Radius (Inside)	0,2 m	0,2 m	0,2 m
Weight (Approximately)	2.360 kg	2.150 kg	2.490 kg
Drive system	Dual front wheel hydraulic motors		
Power Source	24 Vdc Battery 220Ah - 24 Vdc, 4hp electric motor		
Tyres	381 mm dia. solid non-marking		
Controls	Proportional drive and lift controls		
Parking brake	Dual, spring applied hydraulic release		

Standard features

- Roll-out deck extension.
- One hand proportional controls.
- Lift up rear guardrail to ease material loading.
- Tilt, overload and lowering alarm.
- Swing-out service modules.
- Crane and forklift points.
- Selectable motion alarm.
- Non-marking tyres.
- Quick retract guardrails.
- Integrated hour meter and low battery indicator, readable from upper control box.
- 1 year part and labour warranty.
- 5 year structural warranty.

Optional features

- Flashing amber beacon.
- Special paint colours.
- Environmental green oil.
- 1 or 2 year extended warranty.

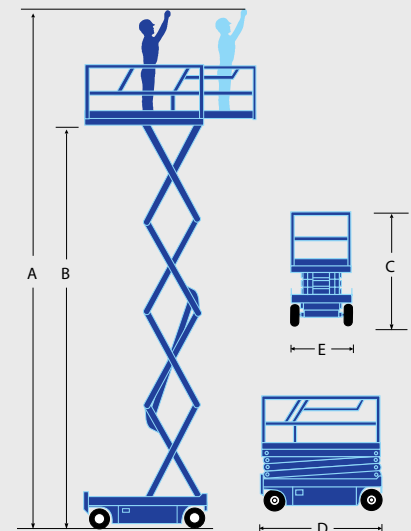

Specifications subject to change without notice. Photos and diagrams in this brochure are for illustrative purposes only.